

# Low Noise Amplifier

## ZFL-1000LN+

50Ω

0.1 to 1000 MHz

### Features

- low noise figure, 2.9 dB typ.
- wideband, 0.1 to 1000 MHz
- protected by US Patent 6,943,629

### Applications

- VHF/UHF
- cellular
- small signal amplifier



Case Style: Y460

| Connectors           | Model       | Price       | Qty.  |
|----------------------|-------------|-------------|-------|
| SMA                  | ZFL-1000LN+ | \$89.95 ea. | (1-9) |
| BRACKET (OPTION "B") |             | \$5.00      | (1+)  |


**+RoHS Compliant**  
 The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Electrical Specifications

| Parameter                          | Frequency (MHz) | Min. | Typ. | Max. | Units |
|------------------------------------|-----------------|------|------|------|-------|
| Frequency Range                    |                 | 0.1  |      | 1000 | MHz   |
| Noise Figure                       | 0.1-1000        | —    | 2.9  | —    | dB    |
| Gain                               | 0.1-1000        | 20   | —    | —    | dB    |
| Gain Flatness                      | 0.1-1000        | —    | —    | ±0.5 | dB    |
| Output Power at 1dB compression    | 0.1-1000        | —    | +3   | —    | dBm   |
| Output third order intercept point | 0.1-1000        | —    | +14  | —    | dBm   |
| Input VSWR                         | 0.1-1000        | —    | 1.5  | —    | :1    |
| Output VSWR                        | 0.1-1000        | —    | 2.0  | —    | :1    |
| DC Supply Voltage                  |                 | —    | 15   | —    | V     |
| Supply Current                     |                 | —    | —    | 60   | mA    |

Open load is not recommended, potentially can cause damage.  
 With no load derate max input power by 20 dB

### Outline Drawing

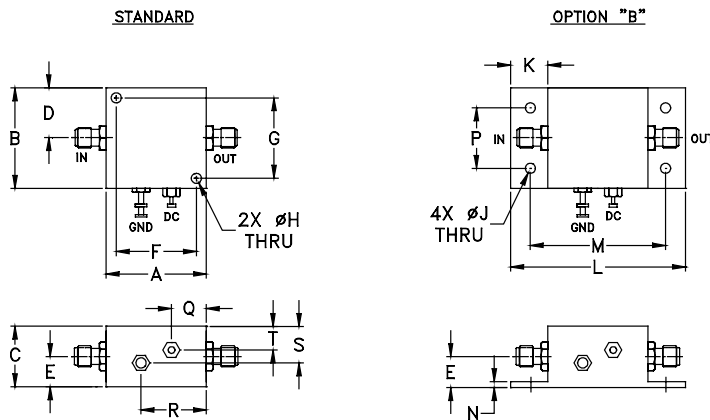

### Maximum Ratings

| Parameter                  | Ratings        |
|----------------------------|----------------|
| Operating Temperature      | -20°C to 71°C  |
| Storage Temperature        | -55°C to 100°C |
| DC Voltage                 | 17V            |
| Input RF Power (no damage) | +5 dBm         |

Permanent damage may occur if any of these limits are exceeded.

### Outline Dimensions (inch/mm)






| A     | B     | C     | D     | E    | F     | G     | H    | J    | K     | L     | M     | N    | P     | Q     | R     | S     | T    | wt.   |
|-------|-------|-------|-------|------|-------|-------|------|------|-------|-------|-------|------|-------|-------|-------|-------|------|-------|
| 1.25  | 1.25  | .75   | .63   | .36  | 1.000 | 1.000 | .125 | .125 | .46   | 2.18  | 1.688 | .06  | .750  | .50   | .80   | .45   | .29  | grams |
| 31.75 | 31.75 | 19.05 | 16.00 | 9.14 | 25.40 | 25.40 | 3.18 | 3.18 | 11.68 | 55.37 | 42.88 | 1.52 | 19.05 | 12.70 | 20.32 | 11.43 | 7.37 | 38    |

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



| FREQUENCY (MHz) | GAIN (dB) |       |       | DIRECTIVITY (dB) |       |       | VSWR (:1) |      | NOISE FIGURE (dB) | POUT at 1 dB COMPR. (dBm) |
|-----------------|-----------|-------|-------|------------------|-------|-------|-----------|------|-------------------|---------------------------|
|                 | 12V       | 15V   | 16V   | 12V              | 15V   | 16V   | IN        | OUT  |                   |                           |
| 0.10            | 19.66     | 23.31 | 23.96 | 29.30            | 27.50 | 27.90 | 1.28      | 1.19 | —                 | 4.76                      |
| 0.70            | 19.90     | 23.56 | 24.24 | 28.80            | 27.10 | 26.90 | 1.11      | 1.13 | —                 | 4.95                      |
| 7.90            | 19.89     | 23.55 | 24.21 | 28.60            | 27.10 | 27.20 | 1.11      | 1.13 | —                 | 5.02                      |
| 95.70           | 19.91     | 23.50 | 24.14 | 28.50            | 27.20 | 26.70 | 1.11      | 1.14 | 2.98              | 4.91                      |
| 384.70          | 19.69     | 23.21 | 23.81 | 25.90            | 24.80 | 24.10 | 1.07      | 1.26 | 3.07              | 6.08                      |
| 487.20          | 20.16     | 23.42 | 23.97 | 25.00            | 23.50 | 22.80 | 1.08      | 1.30 | 3.09              | 6.60                      |
| 615.40          | 20.48     | 23.49 | 24.02 | 22.80            | 21.30 | 21.30 | 1.09      | 1.36 | 3.08              | 7.14                      |
| 743.60          | 20.81     | 23.65 | 24.11 | 21.30            | 19.80 | 19.30 | 1.05      | 1.45 | 3.05              | 7.47                      |
| 871.80          | 20.79     | 23.50 | 23.96 | 19.50            | 18.20 | 17.40 | 1.03      | 1.57 | 3.07              | 7.43                      |
| 1000.00         | 20.84     | 23.32 | 23.66 | 18.10            | 16.60 | 16.20 | 1.06      | 1.71 | 3.11              | 7.00                      |

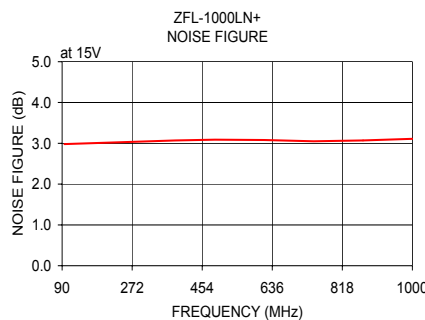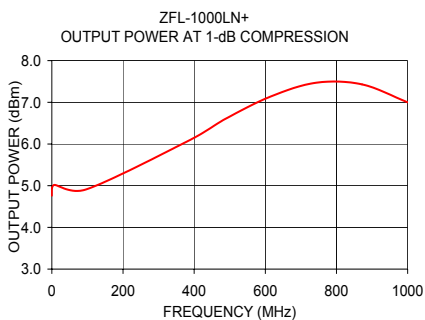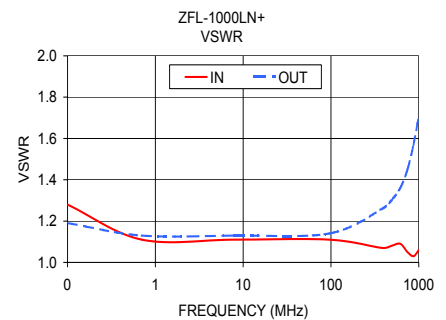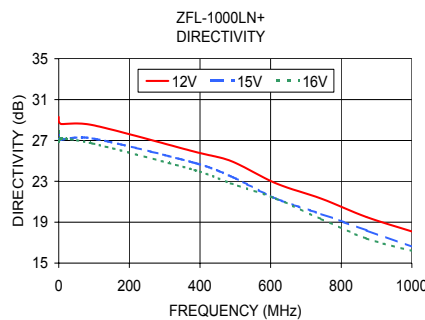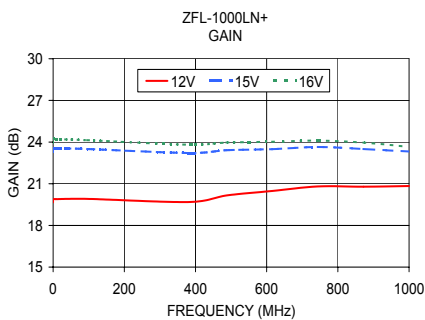

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

